





- 6TOPS NPU
- HDMI and DP display interface
- 2 Independent GigE LAN
- 1 M.2 Socket :1 M.2 Key B
- 2 USB3.0 1 USB2.0, 1 USB3.0
- 12V DC-In

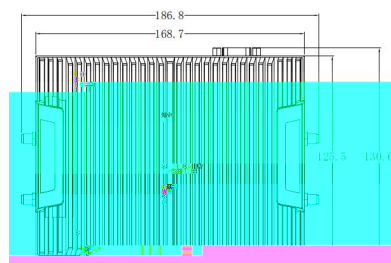

Processor System	CPU	Rk3588,Quad-core ARM Cortex-A76 and Quad-core ARM Cortex-A55 processor, up to 2.6Ghz
	GPU	ARM Mail-G610 MC4
	NPU	6TOPS
	Memory	Onboard Dual Channel LPDDR4/4X Support 4GB/8GB/16GB Optional
Expansion	Interface	1 x M.2 (KEY M 2280) for NVME SSD or 4G/5G Module 1 x Micro Sim Slot 1 x TF Slot
		J × Wl

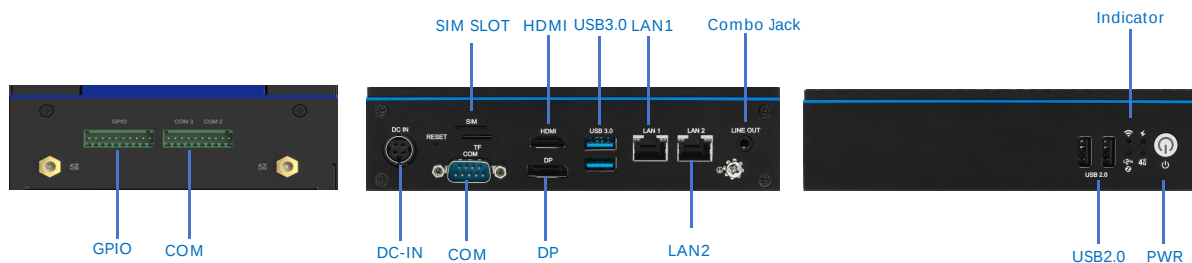

Model	Memory	Display	LAN	USB3	USB2	TYPE-C	Adapter	M.2
E088-A	4GB	2	2	1	3	/	1	1
E088-B	8GB	2	2	1	3	/	1	1

Item	Description
Adapter	x 1
Antenna	x 6 According to configuration optional
User Manual	x 1
Wall-mounting	N/A

SSD128GB	SSD128GB,M.2_M-KEY,2280,NVME
SSD256GB	SSD256GB,M.2_M-KEY,2280,NVME
SSD512GB	SSD512GB,M.2_M-KEY,2280,NVME
SSD1TB	SSD1TB,M.2_M-KEY,2280,NVME
NPU Module	M.2 Key M 2280 Module
4G	M.2 Key B 3042 Module
5G	M.2 Key B 3052 Module