



EVC-7216

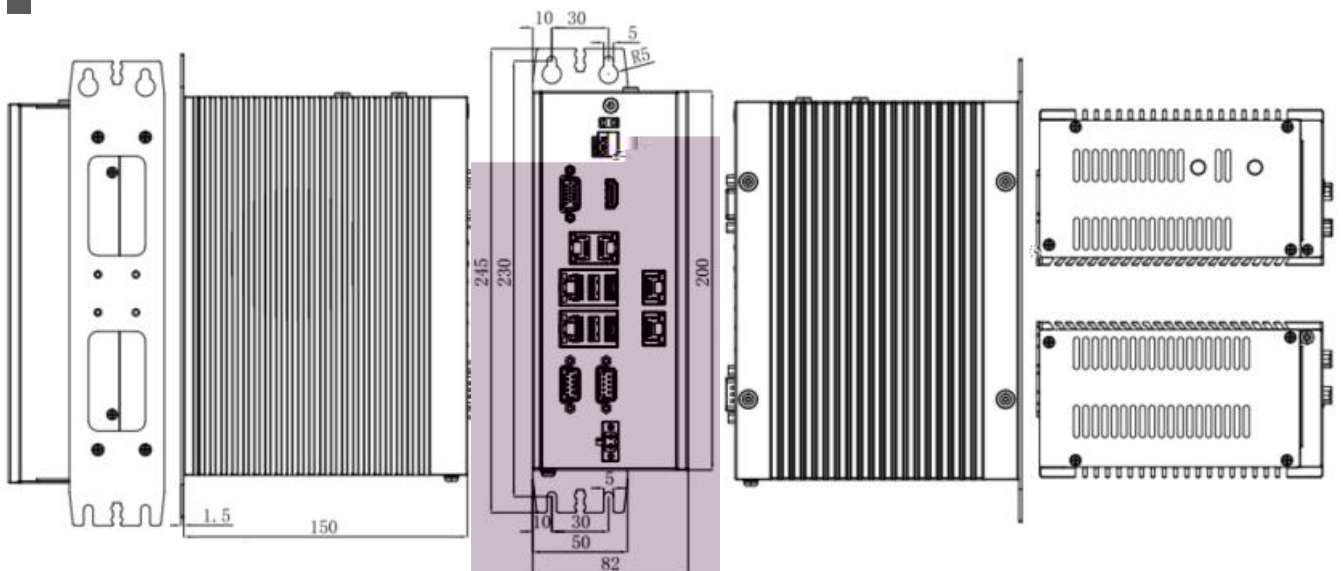

RS232/422/485

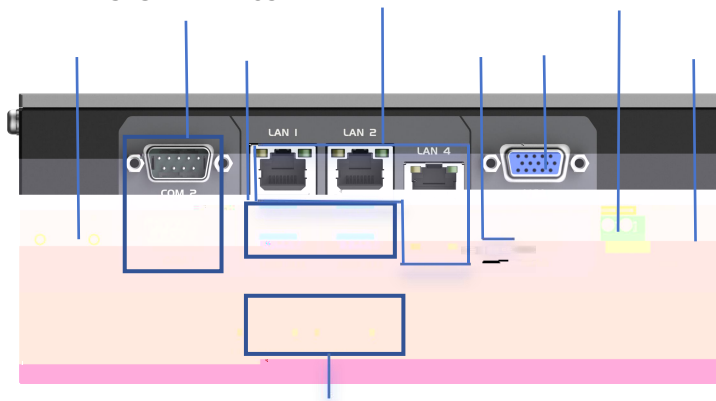

		Intel LGA1151	6/8/9	i3/i5/i7/i9 CPU, TDP	65W
		Z390			
	BIOS	AMI UEFI/Legacy BIOS			
		2xDDR4 2133/2400/2666 MHz SO-DIMM		up to 64GB	
		Win7/Win10/Linux			
I/O	USB	4xUSB3.0, 1xUSB2.0 Type A(	for	)	
	COM	2	:	RS232/422/485(DB9),	
	LED	1xPower, 1xHDD			
	PCIe/M.2/Mini-PCIe	1xMini-PCIe	SIM	4G/5G	)
	Graphics Processor	Intel CPU	(	CPU	)
	Interface	VGA+HDMI			
	SATA/M.2/mSATA	1xmSATA, 1xM.2 2280 NVMe SSD			
	LAN IC	4xi210AT(GbE), 1xX710-AT2(		10GbE)	
	Interface	6xRJ45			
	Power Input	12V~24V, DC in			
	Power Interface	2Pin			
	Watchdog Timer	1 to 255 sec./min. per step			
	Dimensions	82mm(W) 200mm(H) 150mm(D)			
	Mounting	/			
	Operating Temp.	-10~50			
	Storage Temp.	-40~85			
	Humidity	95%@40 C(non-condensing)			
	Shock	With SSD: 15G, IEC 60068-2-27, half sine, 11ms duration			
	Vibration	With SSD:2Grms, IEC 60068-2-64, random	5~500Hz	1 hr/axis	

			LAN	USB3.0	COM	
EVC-7214	Z390	2	6	4	2	1mSATA, 1M.2

EVC-7214	EVC-7214	1
NA	/	1